


fast ice icemaker

MVM1700

MODULAR



by




MVM1700 Features

- **12 months warranty**
- Single and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air cooling system
- Easy cleanable internal rounded surface
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Automatic washing system



Available ice
cube size



Useable Bins

- **MT350**

**Modular ice maker –
Vertical evaporator system**

Daily production up to 780 kg

Hotel						
Restaurant						
Fast food						
Bar						
Nightclub						
Fish market						
Supermarket						
Medical & SPA						
Industry						



Single and crystal cube

AISI 304 SS Scotch Brite finish

Removable and cleanable
air filter

Prod. 24	Air temp.		Water temp.		kg	lbs
	10°C	50°F	7°C	45°F	780	1720
	21°C	70°F	15°C	60°F	770	1698

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaaid.co.uk**

fast ice icemaker

MVM1700 MODULAR



by




Working Conditions

• Location: Indoor	Min	Max
Ambient temperature	+10°C / +50°F	+43°C / 110°F
Water temperature	+3°C / +37°F	+32°C / +90°F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Performances

		Water temperature					
		7°C	45°F	15°C	60°F	21°C	70°F
Air temperature	10°C	780 kg					
	50°F		1720 lbs				
	21°C			770 kg			
	70°F				1698 lbs		
	32°C					680 kg	
	90°F						1499 lbs

Installation Diagram

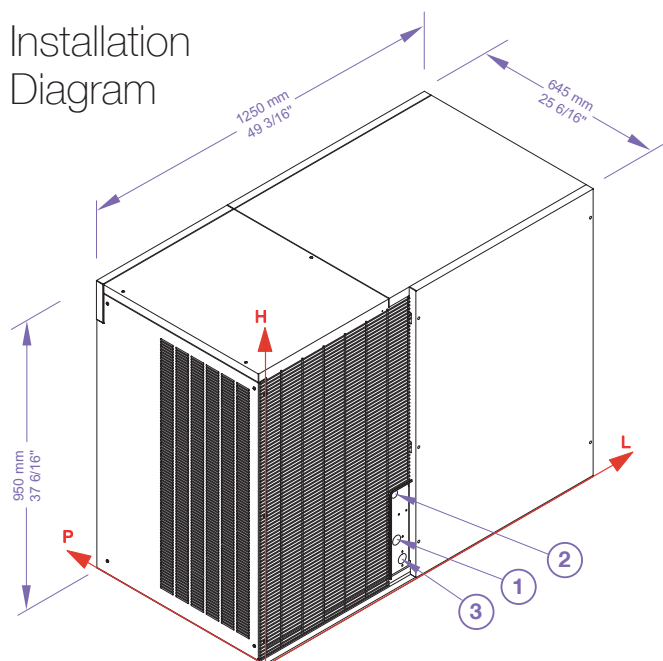

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 527 mm / 20 12/16" - 137 mm / 5 6/16" - 3/4"
- ② Water out.: 550 mm / 21 10/16" - 65 mm / 2 9/16" - 24 mm / 15/16"
- ③ Electrical connections: 520 mm / 20 8/16" - 292 mm / 11 8/16"

Technical Information

Production in 24h	770 kg / 1698 lbs
Cooling system	A
Kind of cube	7g
Refrigerant	R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Average power consumption	4300 W
Fuse	32 A
Water consumption	A: 1.4 l/kg - 16.7 gal/100 lbs

Sizes	(L-P-H mm)	1250 - 645 - 950
	(L-P-H in)	49 3/16 - 25 6/16 - 37 6/16
Sizes with pack	(L-P-H mm)	1350 - 745 - 1150
	(L-P-H in)	53 2/16 - 29 5/16 - 45 4/16
Net weight		186 kg / 410 lbs
Gross weight		242 kg / 534 lbs
Finish		AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

- Standard Cube (7 g)
- Ambient temperature +21°C
- Water temperature +15°C
- Average power consumption at +43°C (standard voltage)

For additional information contact our Sales Team on

T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaaid.co.uk**